



Specs Sheet

All of Landmark Open Frame units include a VHB LCD Module, an Inverter, a Controller Card, and an OSD Kit.


	Part Number	LMK089C	LMK170B	LMK177B	LMK179A	LMK178A
Display Features	Size	10.4"	15.0"	17.0"	19.0"	32.0"
	Active Area	6.2" x 8.3"	9.0" x 12.0"	10.6" x 13.3"	11.9" x 14.8"	15.4" x 27.5"
	Brightness	1500 nits	2000 nits	1200 nits	850 nits	1150 nits
	Contrast Ratio	300:1	500:1	600:1	900:1	750:1
	View Angle	Horizontal $\pm 55^\circ$ Vertical -25° to $+55^\circ$	Horizontal $\pm 60^\circ$ Vertical $\pm 55^\circ$	Horizontal $\pm 70^\circ$ Vertical -60° to $+70^\circ$	Horizontal $\pm 80^\circ$ Vertical $\pm 80^\circ$	Horizontal $\pm 85^\circ$ Vertical $\pm 85^\circ$
	Color Depth	6 bits, 256K	8 bits, 16.7M	8 bits, 16.7M	8 bits, 16.7M	8 bits, 16.7M
	Aspect Ratio	4:3	4:3	4:3	4:3	16:9
	LCD Resolution	VGA (640 x 480)	XGA (1024 x 768)	SXGA (1280 x 1024)	SXGA (1280 x 1024)	WXGA (1366 x 768)
Inputs	Analog RGB	15 pin D-sub	15 pin D-sub	15 pin D-sub	15 pin D-sub	15 pin D-sub
	DVI	N/A	Optional	Optional	Optional	TMDS
	NTSC/PAL	N/A	RCA	RCA	RCA	RCA
	S-Video	N/A	4 pin Mini Din	4 pin Mini Din	4 pin Mini Din	4 pin Mini Din
Others	OSD Control	6 Key: Power, Select, Up, Down, Menu, Auto	6 Key: Power, Menu, Up, Down, +, -			8 Key: Power, Source, Up, Down, Right, Left, Select/Auto, Menu
	Use Controller	MG11	MG22	MG22	MG22	NCB-410U4
	Use Inverter	BI200AT	BI224B	BI320A	BI330C	BI520 & BI522
	Plug & Play	VESDA DDC 2B Ver. 1.3				
	Power Consumption	27 watts	55 watts	62 watts	91 watts	190 watts
	Weight	TBD	TBD	TBD	TBD	6500 grams
	Dimension (in.)	7.4H x 10.4W x 0.9D	10.2H x 12.9W x 1.0D	11.7H x 14.1W x 1.0D	13.0H x 15.9W x 1.0D	17.7H x 30.8W x 2.3D
Surface Treatment	Surface Treatment (3H), *Anti-Glare					

*Anti Reflective coating available by request only.

For more detailed specs, visit our website at www.landmarktek.com.

LMK178A

32.0" Sunlight Readable LCD Open Frame Mechanical Drawing

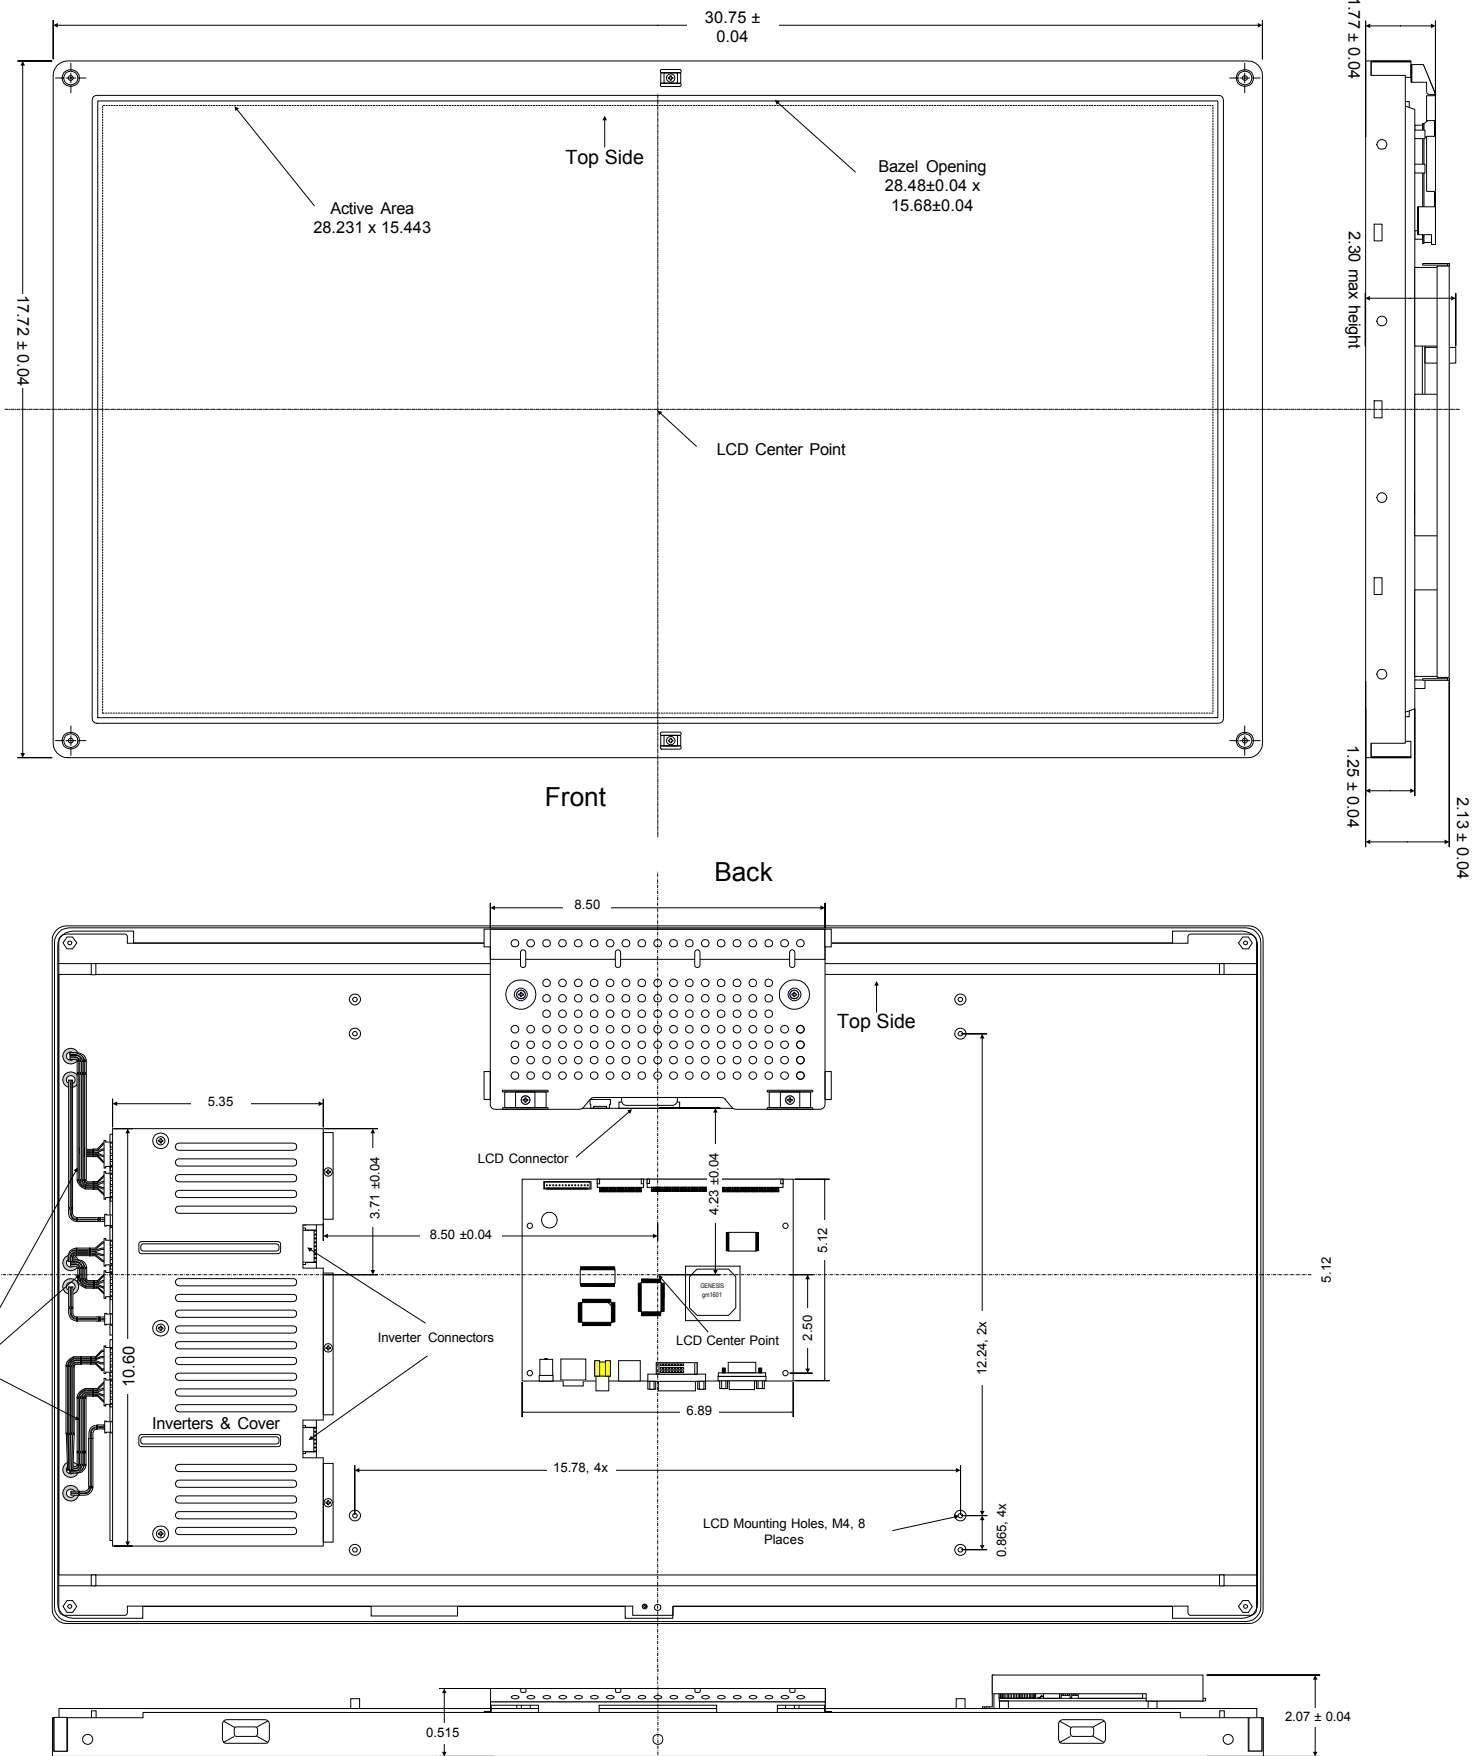

All dimensions are in Inches